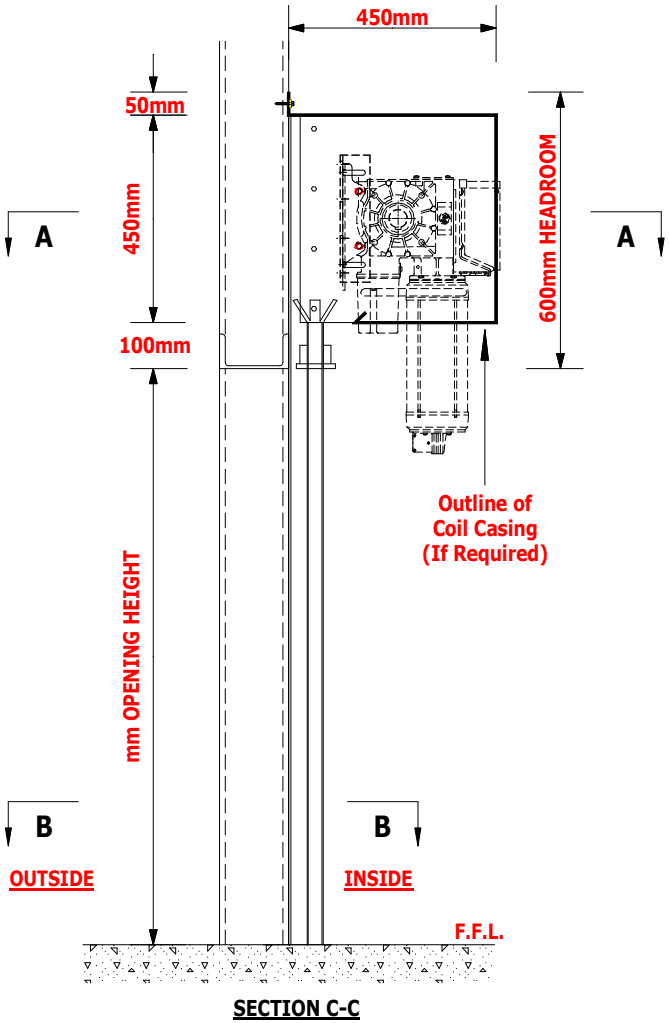

SECTION C-C

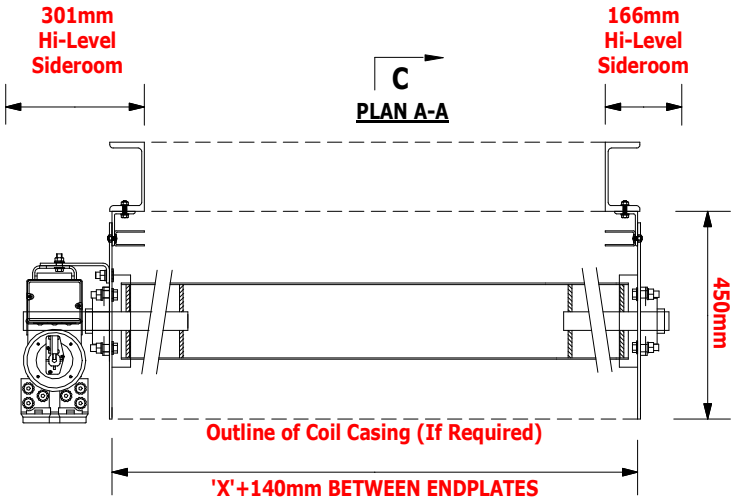

PLAN A-A

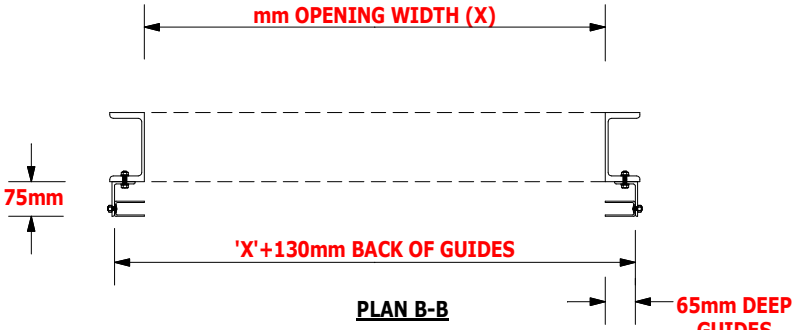

PLAN B-B

Polyester Powder Coat Finish COLOUR:-
Galvanised/Plastisol Curtain Finish

OPERATION:-
ELECTRICAL BY MEANS OF:-
415 Volts 3ph + Neutral Supply Drive Motor.

Client to provide mains supply terminated with an IEC 60309-2, 3 Phase, neutral & earth 16 Amp socket (5 Pin) positioned at low-level below motor position.

REVISIONS	DRAWING NUMBER	REV

ADVANCED DOORS LTD.

QUALITY & SERVICE ASSURED

Park Mill Way
Clayton West Ind. Est.
Clayton West
Huddersfield
West Yorkshire
HD8 9XJ

Tele (01484) 861112
Fax (01484) 861056
email:info@advanceddoors.co.uk
internet: www.advanceddoors.co.uk

CLIENT:-

SITE:-

Life time expectations:-	Door: 20,000 door cycles
Wind Load EN12424	Class 5
Thermal Resistance EN12428	N.P.D. (No Performance Determined)
Water Penetration EN12425	N.P.D.
Air Permeability EN12426	N.P.D.

No.VIKING STAR 3 DOOR(s)

INCLUSIONS:-

SCALE:- N.T.S.	
DATE:-	
DRAWN:-	
CHECKED:-	